

Moly Hi-Load EP

Premium EP2 Grease for Heavy Duty Applications


Moly Hi-Load EP2 Grease is a special long life grease recommended for high load service conditions in hostile environments or where extended service is intended, due to the additional anti-wear protection provided by the presence of molybdenum disulfide. Moly Hi-Load EP2 Grease is manufactured with lithium hydroxystearate base thickener, molybdenum disulphide, selected high viscosity index mineral oils combined with rust, oxidation and corrosion inhibitors and very effective lead free extreme pressure additives.

Summary of Benefits:

- Protects and lubricates all moving parts particularly under heavy or shock loading conditions without failure of the lubricant film.
- Excellent mechanical stability that is very important in vibrating environments as inferior mechanical stability can cause the grease softening with loss of lubrication performance and leakage.
- Formulated to guarantee a much-improved level of resistance to water wash-out to extend bearing life in wet environments.
- Selected base oil components have an excellent oxidation resistance that provides long service life. The grease consistency will not change in storage and it will withstand high operating temperatures without hardening or forming bearing deposits.
- Extra protection against rust and corrosion promotes effective lubrication under difficult environments that may be corrosive or rust prone service situations.

Operating Temperature Range:

The recommended temperature range is from -20 °C to +130 °C, however it may be used at higher temperatures with the lubrication frequency to be increased accordingly.

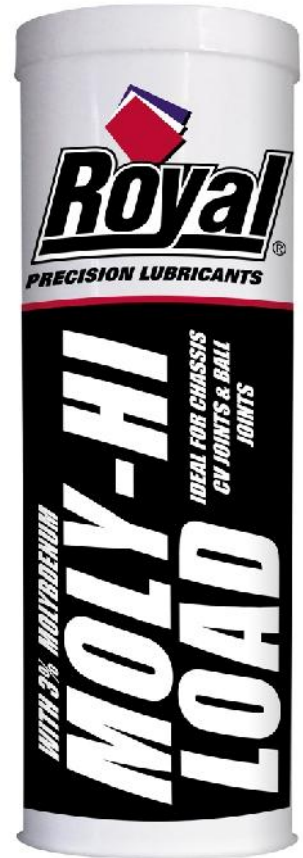

Product Code: 9006

Product Size: 450g, 2.5kg, 20kg, 180kg

V1.1 20/7/18

Victoria
40 Kimberly Road, Dandenong South, Victoria Australia 3175
PO Box 4580, Dandenong South, Victoria Australia 3164
Telephone: 61 +3 9768 2441 Fax: 61+3 9768 3325

Queensland
Cnr Boundary Road & Potassium Street, Narangba, Queensland Australia, 4504
PO Box 139, Deception Bay, Queensland, Australia, 4508
Telephone: 61 +7 3203 0089 Fax: 61 +7 3203 3700



Moly Hi-Load EP

Premium EP2 Grease for Heavy Duty Applications

Moly Hi-Load EP2 Grease is recommended for:

Chassis parts of construction, mining and heavy mobile equipment.
Mining equipment including belt conveyors, hoists, cutting machines, loaders and continuous.
Tractor-trailer fifth wheels, turntables, universal joints, splines, brake self-adjusting screws, clutch release bearings, ball joints. Heavy industry winches, cables, rollers and linkages.
Heavily Loaded Plain, Ball and Rolling Bearings in Industrial machines requiring a high temperature, extreme-pressure grease with 3% Moly.

Typical Characteristics:

NLGI	2
Appearance	Grey/black
Penetration @ 25°C	
Worked 60 Strokes	275
Worked 10,000 Strokes	292
Dropping Point (°C)	192
Water Washable @ 80°C (%)	5
Wheel Bearing Leakage (g)	3
Oxidation Resistance Pressure Drop, 100 hours (kPa)	25
Timken, OK Load (kg)	24
4-Ball Weld Point (kg/f)	425
4-Ball Wear Scar (mm)	0.48
Rust Prevention Characteristics	No rust
Mineral Oil Viscosity (cSt at 40°C)	180
Molybdenum Disulphide (% Mass)	3

*Typical characteristics are only a guide to industry and are not necessarily manufacturing or marketing specifications and do not constitute a legal liability.

Storage:

All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.

Health, Safety and Environment:

A Safety Data Sheet (SDS) is available for each product. Users should consult the SDS, and follow the precautions outlined and comply with all laws and regulations concerning its use and disposal. Used packaging material should not be incinerated or exposed to flame. After use, protect your environment. Do not pollute drains, soil or water with used product.

The Safety Data Sheet is available at Royal Precision Lubricants by email: info@royallubricants.com.au

V1.1 20/7/18

Victoria
40 Kimberly Road, Dandenong South, Victoria Australia 3175
PO Box 4580, Dandenong South, Victoria Australia 3164
Telephone: 61 +3 9768 2441 Fax: 61+3 9768 3325

Queensland
Cnr Boundary Road & Potassium Street, Narangba, Queensland Australia,4504
PO Box 139, Deception Bay, Queensland, Australia, 4508
Telephone: 61 +7 3203 0089 Fax: 61 +7 3203 3700

