

## Product Data Sheet

### **Multipurpose EP2**

*High Quality, Extreme Pressure, General Purpose Grease*

**Multipurpose EP2 Grease** is a multipurpose, extreme pressure, industrial and automotive grease made from lithium soap, sulfur phosphorus extreme pressure additives, a high-quality base oil and rust and oxidation inhibitors. Recommended as a multipurpose automotive and industrial grease for general applications on passenger cars, trucks, busses, trailers, farm tractors and industrial equipment. These include wheel bearings, ball joints, all chassis points, universal joints, splines, linkages, water pumps and steering gears.

#### **Summary of Benefits:**


- Increases bearing and ball joint life by ensuring low wear rate under severe service conditions.
- Good oxidation stability provides long service life, especially where extended lubrication intervals are followed.
- Resists water washing to provide satisfactory lubrication under the most adverse conditions.

#### **Specifications:**

- GMH HN1729, HN1421
- Ford ESN-MIC 160-A/B, ESB-MIC 119-A

**Product Code:** 9001

**Product Size:** 450g, 2.5kg, 20kg, 180kg

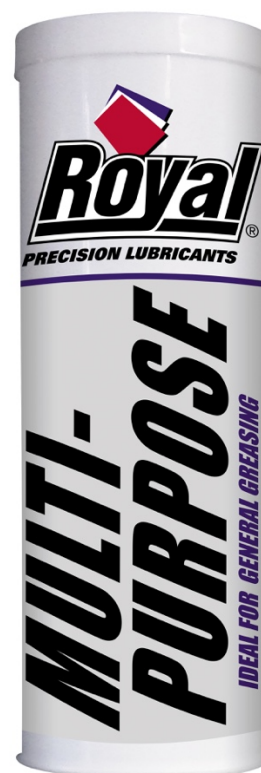

V1. 2/7/19

**WWW.ROYALLUBRICANTS.COM.AU**

**Brisbane:**

1-7 Potassium Street, Narangba,  
QUEENSLAND, AUSTRALIA 4504

**Tel: +61 7 3203 0089 Fax: +61 7 3203 3700**

**...DRIVEN BY PERFECTION**

**Melbourne:**

40 Kimberley Road, Dandenong South,  
VICTORIA, AUSTRALIA 3175

**Tel: +61 3 9768 2441 Fax: +61 3 9768 3325**

## Product Data Sheet

### **Multipurpose EP2**

#### **Typical Characteristics:**

|                               |       |
|-------------------------------|-------|
| NLGI Grade                    | 2     |
| Lithium Soap (% mass)         | 8.6   |
| Penetration @ 25°C            | 275   |
| Colour                        | Brown |
| Timken OK Load (kg)           | 22    |
| Drop Point (°C)               | 180   |
| Base Oil Viscosity (cSt 40°C) | 153   |

*\*Typical characteristics are only a guide to industry and are not necessarily manufacturing or marketing specifications and do not constitute a legal liability.*

#### **Storage:**

*All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.*

#### **Health, Safety and Environment:**

*A Safety Data Sheet (SDS) is available for each product. Users should consult the SDS, and follow the precautions outlined and comply with all laws and regulations concerning its use and disposal. Used packaging material should not be incinerated or exposed to flame. After use, protect your environment. Do not pollute drains, soil or water with used product.*

*The Safety Data Sheet is available at Royal Precision Lubricants website [www.royallubricants.com.au](http://www.royallubricants.com.au) or by email: [info@royallubricants.com.au](mailto:info@royallubricants.com.au).*

V1. 2/7/19

**WWW.ROYALLUBRICANTS.COM.AU**

**Brisbane:**

1-7 Potassium Street, Narangba,  
QUEENSLAND, AUSTRALIA 4504

**Tel: +61 7 3203 0089 Fax: +61 7 3203 3700**

**...DRIVEN BY PERFECTION**

**Melbourne:**

40 Kimberley Road, Dandenong South,  
VICTORIA, AUSTRALIA 3175

**Tel: +61 3 9768 2441 Fax: +61 3 9768 3325**