

## Red-Tac EP

Super Tacky, Stay-In-Place, Heavy Duty Grease


RED-TAC Grease is a premium, heavy duty EP grease containing a high viscosity mineral oil, lithium thickener, special EP additive, rust and oxidation inhibitors and a tackiness agent. RED-TAC exhibits stay-in-place properties which make them particularly suitable for automotive and industrial equipment operating in wet, muddy or dusty conditions. Usable temperature range in continuous service is -20 to 140°C Maximum temperature for short term exposure is 165°C

### Summary of Benefits:

- Reduces maintenance costs: Outstanding film strength and effective EP additive protect against component wear under severe conditions.
- Protects against corrosion: Highly effective rust and corrosion inhibitors protect metal surfaces, even under extremely wet conditions.

### Applications:

REDTAC is recommended for Chassis Points, Linkages, Bucket Pins, Roller Element Bearings, Plain Bearings for low speed applications in farming, earthmoving, logging, forestry, agriculture, heavy transport and dredging.

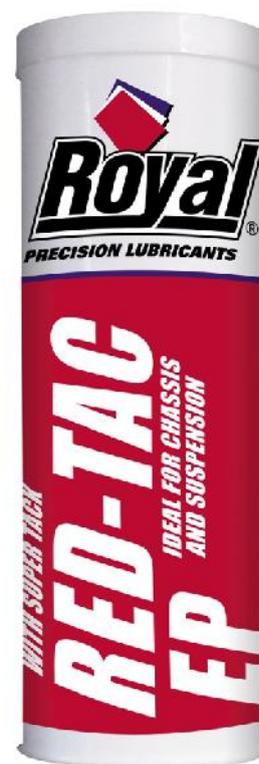

Product Code: 9008

Product Size: 450g, 500g, 2.5kg, 20kg

V1.1 20/7/18

Victoria  
40 Kimberly Road, Dandenong South, Victoria Australia 3175  
PO Box 4580, Dandenong South, Victoria Australia 3164  
Telephone: 61 +3 9768 2441 Fax: 61+3 9768 3325

Queensland  
Cnr Boundary Road & Potassium Street, Narangba, Queensland Australia,4504  
PO Box 139, Deception Bay, Queensland, Australia, 4508  
Telephone: 61 +7 3203 0089 Fax: 61 +7 3203 3700



## Red-Tac EP

Super Tacky, Stay-In-Place, Heavy Duty Grease

### Typical Characteristics:

NLGI	2
Penetration @ 25°C	280
Base Oil Viscosity, cSt at 100°C	25
Base Oil Viscosity, cSt at 40°C	470
Dropping Point (°C)	180
Timken, OK Load (kg)	32
Lithium Soap, %m	9
Colour	Red
Texture	Smooth

\*Typical characteristics are only a guide to industry and are not necessarily manufacturing or marketing specifications and do not constitute a legal liability.

### Storage:

All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.

### Health, Safety and Environment:

A Safety Data Sheet (SDS) is available for each product. Users should consult the SDS, and follow the precautions outlined and comply with all laws and regulations concerning its use and disposal. Used packaging material should not be incinerated or exposed to flame. After use, protect your environment. Do not pollute drains, soil or water with used product.

The Safety Data Sheet is available at Royal Precision Lubricants by email: [info@royallubricants.com.au](mailto:info@royallubricants.com.au).

V1.1 20/7/18

Victoria  
40 Kimberly Road, Dandenong South, Victoria Australia 3175  
PO Box 4580, Dandenong South, Victoria Australia 3164  
Telephone: 61 +3 9768 2441 Fax: 61+3 9768 3325

Queensland  
Cnr Boundary Road & Potassium Street, Narangba, Queensland Australia,4504  
PO Box 139, Deception Bay, Queensland, Australia, 4508  
Telephone: 61 +7 3203 0089 Fax: 61 +7 3203 3700

