

## Product Data Sheet

### ULTRA 2-Stroke

*Low Smoke SEMI SYNTHETIC Two-Stroke Engine Oil*

**ULTRA 2-Stroke** is a low ash ULTRA high performance two stroke engine oil for use in 2-stroke air cooled applications excluding marine. It provides better protection from piston and exhaust port deposits and exceptional anti-scuff protection. ULTRA 2-Stroke is capable of mixing ratios up to 100:1 in selected equipment capable of running at these ratios. The engine manufacturer's recommendation regarding fuel/oil ratios should be strictly followed.

#### Summary of Benefits:

- Low ash and low smoke formulation controls piston, port and plug cleanliness
- Suitable for API: TC requirements
- Contains a diluent to aid mixing with petrol.

#### Specifications:

- SAE Viscosity: 20W
- API: TC
- ISO: GD, ECG, EGD, T.I.S.I
- JASO: FC
- Global GD

#### Mixing Ratios:


<b>25:1</b>	<b>200ML</b>	<b>PER 5L OF FUEL</b>
<b>50:1</b>	<b>100ML</b>	<b>PER 5L OF FUEL</b>
<b>100.1</b>	<b>50ML</b>	<b>PER 5L OF FUEL</b>

**Product Code:** 1902

**Product Size:** 1L Chamber, 2.5L, 20L, 205L, 1000L



14.02.19 V1

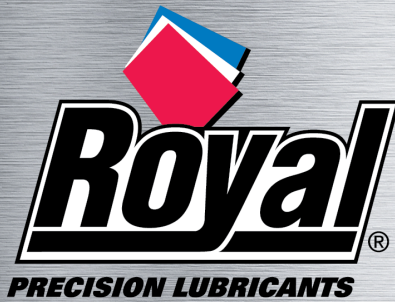

**THE INNOVATIVE  
AUSTRALIAN**

## Product Data Sheet

### **ULTRA Two Stroke**

*Low Smoke SEMI SYNTHETIC 2- Stroke Engine Oil*

---

#### **Typical Characteristics:**

Density at 15°C (kg/L)	0.87
Flash Point COC (°C)	156
Sulphated Ash %m	0.18
Kinematic Viscosity at 40°C mm <sup>2</sup> /s (cSt)	53.7
Kinematic Viscosity at 100°C mm <sup>2</sup> /s (cSt)	8.6
Viscosity Index	136

*\*Typical characteristics are only a guide to industry and are not necessarily manufacturing or marketing specifications and do not constitute a legal liability.*

#### **Storage:**

*All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.*

#### **Health, Safety and Environment:**

*A Safety Data Sheet (SDS) is available for each product. Users should consult the SDS, and follow the precautions outlined and comply with all laws and regulations concerning its use and disposal. Used packaging material should not be incinerated or exposed to flame. After use, protect your environment. Do not pollute drains, soil or water with used product.*

*The Safety Data Sheet is available at Royal Precision Lubricants website [www.royallubricants.com.au](http://www.royallubricants.com.au) or by email [info@royallubricants.com.au](mailto:info@royallubricants.com.au)*

14.02.19 V1

**WWW.ROYALLUBRICANTS.COM.AU**

**Brisbane:**

1-7 Potassium Street, Narangba,  
QUEENSLAND, AUSTRALIA 4504

**Tel: +61 7 3203 0089** Fax: +61 7 3203 3700

**...DRIVEN BY PERFECTION**

**Melbourne:**

40 Kimberley Road, Dandenong South,  
VICTORIA, AUSTRALIA 3175

**Tel: +61 3 9768 2441** Fax: +61 3 9768 3325