



**THE INNOVATIVE
AUSTRALIAN**

Product Data Sheet

Senso Lovis 10W-30

High Performance Engine Oil for Superior Wear and Protection

Senso Lovis is a high performance, energy conserving engine oil. It has been designed to provide excellent fuel efficiency and exceptional engine wear protection, particularly at cold start-ups.

Senso Lovis has been designed for use where the engine manufacturer recommends low viscosity oil such as 10W-30 or 7.5W-30. It is recommended for use in Ford AU model, imported Ford US and European models such as Festiva, Mondeo, Taurus, Explorer and the petrol Transit van. It is also suitable for many other US models such as Chrysler and Nissan where a 7.5W-30 oil is specified.

Summary of Benefits:

- Rapid oil flow at start up to minimise engine wear.
- Superior sludge and varnish control for a cleaner engine.
- Reduces emissions for a cleaner environment.
- Specifically designed for modern close-fitting engines.

Specifications:

- API: SP/CF
- SAE Viscosity: 10W-30
- ILSAC: GF-6A
- Ford: MC2 153-E

Product Code: 1202

Product Size: 1L, 5L, 8L, 20L, 205L



14.02.19 V1

WWW.ROYALLUBRICANTS.COM.AU

Brisbane:

1-7 Potassium Street, Narangba,
QUEENSLAND, AUSTRALIA 4504


Tel: +61 7 3203 0089 Fax: +61 7 3203 3700

...DRIVEN BY PERFECTION

Melbourne:

40 Kimberley Road, Dandenong South,
VICTORIA, AUSTRALIA 3175

Tel: +61 3 9768 2441 Fax: +61 3 9768 3325

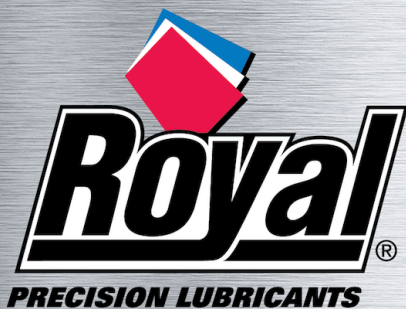

**THE INNOVATIVE
AUSTRALIAN**

Product Data Sheet

Senso Lovis 10W-30

Typical Characteristics:

Density at 15°C (kg/L)	0.871
Flash Point COC (°C)	200
Pour Point (°C)	-30
Kinematic Viscosity at 40°C mm ² /s (cSt)	80
Kinematic Viscosity at 100°C mm ² /s (cSt)	11.5
Viscosity Index	135
Sulphated Ash (%m)	<1.0
Total Base Number (mg KOH/g)	5.9

**Typical characteristics are only a guide to industry and are not necessarily manufacturing or marketing specifications and do not constitute a legal liability.*

Storage:

All packages should be stored under cover to avoid the possible ingress of water and the obliteration of drum markings. Products should not be stored above 60°C.

Health, Safety and Environment:

A Safety Data Sheet (SDS) is available for each product. Users should consult the SDS, and follow the precautions outlined and comply with all laws and regulations concerning its use and disposal. Used packaging material should not be incinerated or exposed to flame. After use, protect your environment. Do not pollute drains, soil or water with used product.

The Safety Data Sheet is available at Royal Precision Lubricants website www.royallubricants.com.au or by email info@royallubricants.com.au

14.02.19 V1

WWW.ROYALLUBRICANTS.COM.AU

Brisbane:

1-7 Potassium Street, Narangba,
QUEENSLAND, AUSTRALIA 4504
Tel: +61 7 3203 0089 Fax: +61 7 3203 3700

...DRIVEN BY PERFECTION

Melbourne:

40 Kimberley Road, Dandenong South,
VICTORIA, AUSTRALIA 3175
Tel: +61 3 9768 2441 Fax: +61 3 9768 3325